



NEW



Heat Pump DC Inverter Split

PYRENEES

New High Wall Line

POWER HEATING & EFFICIENCY

HEATING CAPACITY:

9000 **UP TO** 12600 BTU

12000 **UP TO** 16300 BTU




HIGH SEER:

7,1: 9000 BTU

7,5: 12000 BTU

PYRENEES NEW HIGH WALL LINE

Heat Pump DC Split Inverter

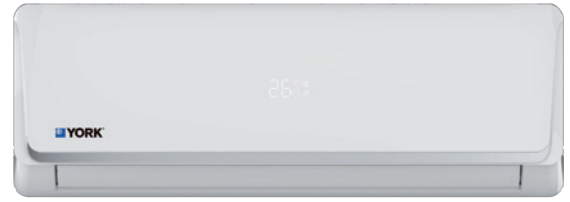

Set reference			YHKF_ZEEBMHORX			
Indoor unit	Sizes		YHKF09YEEBMHO-X	YHKF12YEEBMHO-X	YHKF18YEEBMHO-X	YHKF24YEEBMHO-X
Outdoor unit	Sizes		YHKF09XEEBMH-RX	YHKF12XEEBMH-RX	YHKF18XEEBMH-RX	YHKF24XEEBMH-RX
Cooling capacity	kW		2.7 (1.0 ~ 3.2)	3.5 (0.8 ~ 4.2)	5.3 (1.7 ~ 6.2)	7.3 (2.6 ~ 8.4)
Heating capacity	kW		2.9 (0.9 ~ 3.7)	3.8 (0.8 ~ 4.8)	5.6 (1.1 ~ 7.0)	7.6 (1.5 ~ 9.4)
Compressor	Type		Rotary			
Refrigerant			R32			
Power supply	V/Ph/Hz		230 / 1 / 50 + E			
Power input	cooling	W	70 ~ 1230	50 ~ 1600	120 ~ 2390	230 ~ 3350
	heating	W	140-1310	130-1710	190-2490	230-3370
SEER			7.1	7.5	6.7	6.9
SCOP			4.0	4.2	4.0	4.0
Energy Class	cooling		A++	A++	A++	A++
	heating		A+	A+	A+	A+
Indoor airflow (H/M/L)	m³/h		521 / 429 / 259	539 / 478 / 294	750 / 505 / 420	1050 / 750 / 560
Sound pressure at 1 m	Indoor (H/M/L)	dB(A)	37 / 29.5 / 22	38 / 30 / 22	42 / 33 / 27	46 / 40 / 30
	Outdoor	dB(A)	55	55	57	59
Dimensions	Indoor	H (mm)	290	297	319	335
		W (mm)	722	802	965	1 080
		D (mm)	187	189	215	226
	Outdoor	H (mm)	555	555	554	700
		W (mm)	770	770	800	845
		D (mm)	300	300	333	320
Net weight	Indoor unit	kg	7.4	8.2	9	12
	Outdoor unit	kg	26.4	26.5	37	48
Piping	Type of connection		Flare			
	Diameter	Gas	3/8"	3/8"	1/2"	5/8"
		Liquid	1/4"	1/4"	1/4"	3/8"
Refrigerant charge	g		700	800	1 250	1 600
Pipe run	Length	m	25	25	30	50
	Height	m	10	10	20	25
Operating limit - cooling mode	min./max.		-15°C / +50°C			
Operating limit - heating mode	min./max.		-15°C / +30°C			

Nominal cooling capacity based on : - Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB
 Nominal heating capacity based on : - Indoor Air Temp. 21°C DB - Outdoor Air Temp. 7°C DB/6°C WB
 Piping length : 5 m with initial charge

Features



- Refrigerant R32 (Zero ODP)
- DC Inverter compressor
- Low noise levels
- High SEER & SCOP, class A++ and A+
- High density filter
- 2-way draining
- Quiet design with low noise
- Self diagnosis
- Service valve protection cover
- **Blue fin protection (indoor and outdoor units)**

Remote controller



- Wireless
- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- Multi-speed fan selection
- Mute and Sleep function
- Follow me function
- ON/OFF timer
- Air flow direction setting
- LCD display
- Turbo mode